


INFYENERGY SUNFACTORY PVT LTD.,

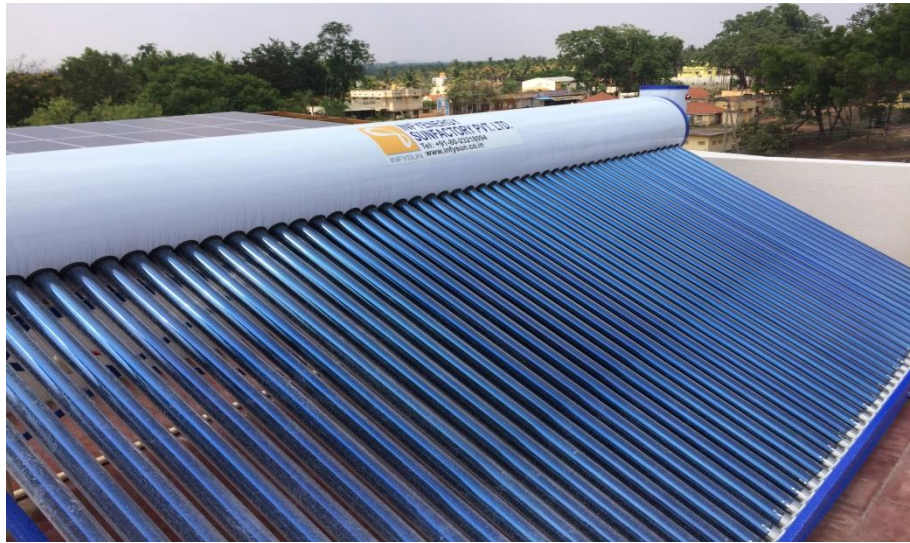

HIGH PERFORMANCE, AFFORDABLE GREAT VALUE FOR MONEY

FEATURES	ISPL SPECIFICATION			
	ISPL-100 LPD	ISPL-200 LPD	ISPL-300 LPD	ISPL-500 LPD
Evacuated tube collector	47x1800 mm	47x 1800 mm	47x1800mm	70x2100mm
Anode protection	√	√	√	√
High Transmissivity triple layered clog & choke free collector	√	√	√	√
UV Resisted powder coated MS Structure	√	√	√	√
Galvanised Steel inner tank with epoxy coating	√	√	√	√
200 ppm inner tank for longer life	√	√	√	√
Minimum temperature drop at nights	√	√	√	√
Daily Free hot water @60° to 90°C	√	√	√	√
COMPONENTS				
Galvanised Steel Inner tank	√	√	√	√
Galvanised outer cover with powder Coating	√	√	√	√
Galvanised Sockets	√	√	√	√
MS Stand with powder coating	√	√	√	√
PUF Insulation upto 50 mm	√	√	√	√
Tube Diameter – 56 mm	√	√	√	√
WARRANTEE				
5 Years	√	√	√	√

Terms & Conditions:

- Assuming 200lpd water heater saves an average 8 units / day at an average cost of Rs.4 per unit for 365 days.
- Water hardness < 200 ppm for effective performance of the system.
- PUF insulation can be provided based on the application and customer requirement.
- 5 year Warrantee (3 years tank warrantee + 2 years performance warranty)